

Type 2, 4+4+4+PE

7.084.954.101 / 7.084.954.102

1. max. 40 mm

2. 3 - 4 mm
Power + PE
+Signal

3. x

4. **!**
x Contact ø 1 mm = max. 4 mm stripping length
Contact ø 2 mm = max. 7 mm stripping length

5. crimp
crimp
(5x Power, 4x Signal)

6. max. 25 mm Ethernet EMC

7. x

8. **!**
x Contact ø 0,8 mm = max. 4 mm stripping length

9. crimp
4x Ethernet


10. klik

Assembly Instructions


Type 2, 4+4+4+PE

7.084.954.101 / 7.084.954.102


11.

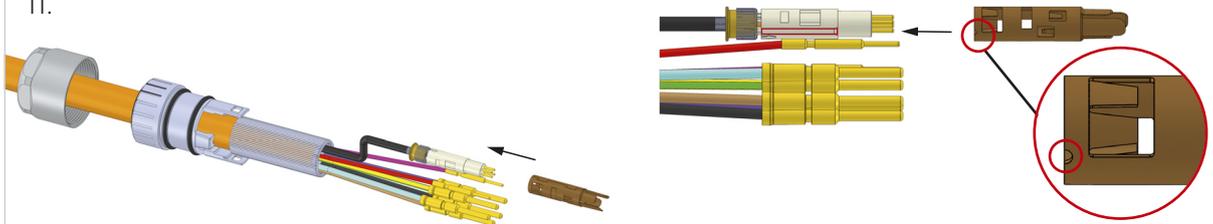


12.1




12.2




12.3




12.4



13.

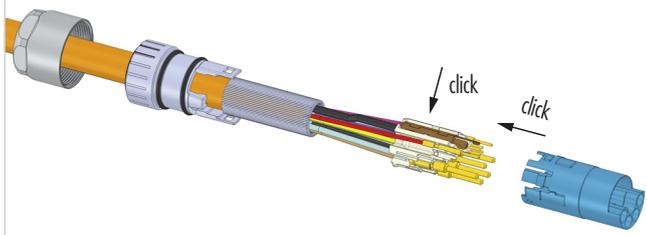

14.

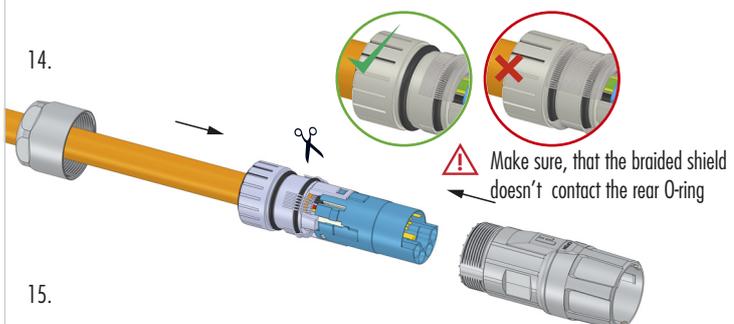

15.

